


Technical data

Duropal HPL Compact, black core

Compact high-pressure laminate in standard quality according to EN 438-4:CGS. With uniform black-coloured core and decorative melamine resin surface on both sides.

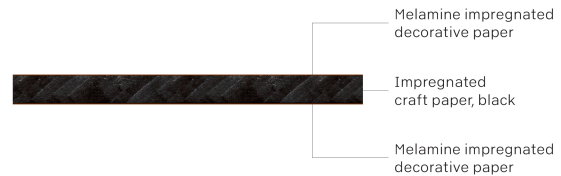


Specification								Unit	Standard
Nominal thickness	2	3	4	5	6	7	8	mm	
Tolerance on thickness	± 0.2	± 0.3	± 0.3	± 0.4	± 0.4	± 0.4	± 0.5	mm	EN 438-2:2016
Tolerance on length				+ 10				mm	EN 438-2:2016
Tolerance on width				+ 10				mm	EN 438-2:2016
Surface defects				max. 1 ¹⁾ max. 10 ²⁾				mm ² /m ² mm/m ²	EN 438-4:2016
Edge defects				max. 3				mm	EN 438-4:2016
Straightness of edges				max. 1.5				mm/m	EN 438-2:2016
Squareness				max. 1.5				mm/m	EN 438-2:2016
Flatness	max. 8	max. 8	max. 8	max. 8	max. 5	max. 5	max. 5	mm/m	EN 438-2:2016
Density				min. 1,350				kg/m ³	EN ISO 1183-1
Bending strength				min. 80				MPa	EN ISO 178
Flexural modulus				min. 9,000				MPa	EN ISO 178
Resistance to crazing				min. 4				rating	EN 438-2:2016
Dimensional stability at elevated temperature (length)	max. 0.4	max. 0.4	max. 0.4	max. 0.3	max. 0.3	max. 0.3	max. 0.3	%	EN 438-2:2016
Dimensional stability at elevated temperature (width)	max. 0.8	max. 0.8	max. 0.8	max. 0.6	max. 0.6	max. 0.6	max. 0.6	%	EN 438-2:2016
Resistance to wet heat, 100 °C (smooth finishes)				min. 3				rating	EN 438-2:2016
Resistance to wet heat, 100 °C (textured finishes)				min. 4				rating	EN 438-2:2016
Resistance to dry heat, 160 °C (smooth finishes)				min. 3				rating	EN 438-2:2016
Resistance to dry heat, 160 °C (textured finishes)				min. 4				rating	EN 438-2:2016
Resistance to water vapour (smooth finishes)				min. 3				rating	EN 438-2:2016
Resistance to water vapour (textured finishes)				min. 4				rating	EN 438-2:2016
Resistance to immersion in boiling water (smooth finishes)				min. 3				rating	EN 438-2:2016
Resistance to immersion in boiling water (textured finishes)				min. 4				rating	EN 438-2:2016
Resistance to immersion in boiling water (edge)				min. 3				rating	EN 438-2:2016
Resistance to immersion in boiling water	max. 5 ³⁾ max. 6 ⁴⁾	max. 5 ³⁾ max. 6 ⁴⁾	max. 5 ³⁾ max. 6 ⁴⁾	max. 2 ^{3) 4)}	max. 2 ^{3) 4)}	max. 2 ^{3) 4)}	max. 2 ^{3) 4)}	%	EN 438-2:2016
Resistance to surface wear				min. 150				cycles	EN 438-2:2016
Resistance to scratching (smooth finishes)				min. 2				rating	EN 438-2:2016
Resistance to scratching (textured finishes)				min. 3				rating	EN 438-2:2016
Resistance to shocks (large diameter ball) – impression diameter				max. 10				mm	EN 438-2:2016

Technical data

Duropal HPL Compact, black core

Compact high-pressure laminate in standard quality according to EN 438-4:CGS. With uniform black-coloured core and decorative melamine resin surface on both sides.

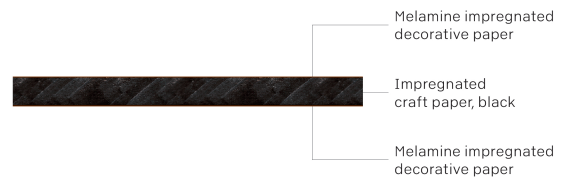

Specification								Unit	Standard
Nominal thickness	2	3	4	5	6	7	8	mm	
Resistance to shocks (large diameter ball) - Fall height	min. 1,400	min. 1,400	min. 1,400	min. 1,400	min. 1,800	min. 1,800	min. 1,800	mm	EN 438-2:2016
Stain resistance (groups 1 & 2)	min. 5							rating	EN 438-2:2016
Stain resistance (group 3)	min. 4							rating	EN 438-2:2016
Light fastness (xenon arc)	4 to 5 grey scale rating								EN 438-2:2016
Fire behavior	normally flammable								
Reaction to fire (Euroclass)	not classified	not classified	not classified	not classified	D-s2,d0	D-s2,d0	D-s2,d0		EN 13501-1, CWFT acc. to 2003/593/EG
Formaldehyde emission class	E1								EN 717-1

¹⁾ Dirt, spots and similar surface defects

²⁾ Fibres, hairs and scratches


³⁾ Mass increase

⁴⁾ Thickness increase

Technical data

Duropal HPL Compact, black core

Compact high-pressure laminate in standard quality according to EN 438-4:CGS. With uniform black-coloured core and decorative melamine resin surface on both sides.

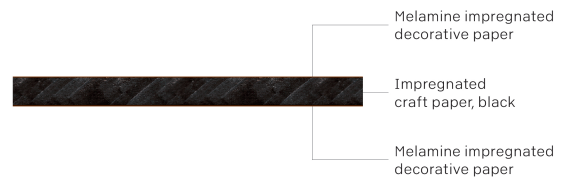

Specification							Unit	Standard
Nominal thickness	9	10	11	12	13	15	mm	
Tolerance on thickness	± 0.5	± 0.5	± 0.5	± 0.6	± 0.6	± 0.6	mm	EN 438-2:2016
Tolerance on length				+ 10			mm	EN 438-2:2016
Tolerance on width				+ 10			mm	EN 438-2:2016
Surface defects			max. 1 ¹⁾ max. 10 ²⁾				mm ² /m ² mm/m ²	EN 438-4:2016
Edge defects			max. 3				mm	EN 438-4:2016
Straightness of edges			max. 1.5				mm/m	EN 438-2:2016
Squareness			max. 1.5				mm/m	EN 438-2:2016
Flatness	max. 5	max. 3	max. 3	max. 3	max. 3	max. 3	mm/m	EN 438-2:2016
Density			min. 1,350				kg/m ³	EN ISO 1183-1
Bending strength			min. 80				MPa	EN ISO 178
Flexural modulus			min. 9,000				MPa	EN ISO 178
Resistance to crazing			min. 4				rating	EN 438-2:2016
Dimensional stability at elevated temperature (length)			max. 0.3				%	EN 438-2:2016
Dimensional stability at elevated temperature (width)			max. 0.6				%	EN 438-2:2016
Resistance to wet heat, 100 °C (smooth finishes)			min. 3				rating	EN 438-2:2016
Resistance to wet heat, 100 °C (textured finishes)			min. 4				rating	EN 438-2:2016
Resistance to dry heat, 160 °C (smooth finishes)			min. 3				rating	EN 438-2:2016
Resistance to dry heat, 160 °C (textured finishes)			min. 4				rating	EN 438-2:2016
Resistance to water vapour (smooth finishes)			min. 3				rating	EN 438-2:2016
Resistance to water vapour (textured finishes)			min. 4				rating	EN 438-2:2016
Resistance to immersion in boiling water (smooth finishes)			min. 3				rating	EN 438-2:2016
Resistance to immersion in boiling water (textured finishes)			min. 4				rating	EN 438-2:2016
Resistance to immersion in boiling water (edge)			min. 3				rating	EN 438-2:2016
Resistance to immersion in boiling water			max. 2 ^{3) 4)}				%	EN 438-2:2016
Resistance to surface wear			min. 150				cycles	EN 438-2:2016
Resistance to scratching (smooth finishes)			min. 2				rating	EN 438-2:2016
Resistance to scratching (textured finishes)			min. 3				rating	EN 438-2:2016
Resistance to shocks (large diameter ball) – impression diameter			max. 10				mm	EN 438-2:2016

Technical data

Duropal HPL Compact, black core

Compact high-pressure laminate in standard quality according to EN 438-4:CGS. With uniform black-coloured core and decorative melamine resin surface on both sides.



Specification							Unit	Standard
Nominal thickness	9	10	11	12	13	15	mm	
Resistance to shocks (large diameter ball) - Fall height	min. 1,800						mm	EN 438-2:2016
Stain resistance (groups 1 & 2)	min. 5						rating	EN 438-2:2016
Stain resistance (group 3)	min. 4						rating	EN 438-2:2016
Light fastness (xenon arc)	4 to 5 grey scale rating							EN 438-2:2016
Fire behavior	normally flammable							
Reaction to fire (Euroclass)	D-s2,d0							EN 13501-1, CWFT acc. to 2003/593/EG
Formaldehyde emission class	E1							EN 717-1

¹⁾ Dirt, spots and similar surface defects

²⁾ Fibres, hairs and scratches

³⁾ Mass increase

⁴⁾ Thickness increase


Additional information

Product standard	<ul style="list-style-type: none"> EN 438-4
Areas of application	<ul style="list-style-type: none"> Partition walls, doors and furniture in sanitary and wet areas, such as in spa and leisure facilities. For higher hygiene demands in hospitals, laboratories and the medical sector, for shop and kitchen facilities and wherever high sturdiness of the material is demanded. Also for furniture and fitting elements in private and public sectors, especially where minimum material cross-sections or open edge solutions are required.
Product safety	<ul style="list-style-type: none"> The decorative surface and the core consists of paper layers that are impregnated with thermosetting resins. The resins harden completely during the manufacturing process by heat and high pressure. They form a stable, resistant and non-reactive material. The surface is physiologically safe, and approved for direct contact with food acc. to Regulation (EU) No. 10/2011. This product is following the REACH regulation EC 1907/2006 an article. Following Article 7 it needs not to be registered.
Special	<ul style="list-style-type: none"> FSC[®]-certification (license code: FSC-C011773) or PEFC-certification (license code: PEFC/04-32-0828) - available on request. The coarser the structure and the lighter the decor, the greater the scratch resistance. The smoother the structure and the the darker the decor, the more sensitive it gets to stains. For production-related reasons, there may be minor colour variations in the black material core. Due to the black core of the material, minor decorative deviations to other products cannot be avoided. Depending on the decor and surface texture, slightly different surface visual impressions can result between format boards viewed from different angles. This is a result of the production methods and does not constitute a quality defect. Especially for large applications, we recommend paying attention to the colour and texture homogeneity of the boards and cut products used when further processing and installing and that the material is used taking into account the production direction. Also in anti-bacterial quality – with Duropal microPLUS[®].

Technical data

Duropal HPL Compact, black core

Compact high-pressure laminate in standard quality according to EN 438-4:CGS. With uniform black-coloured core and decorative melamine resin surface on both sides.

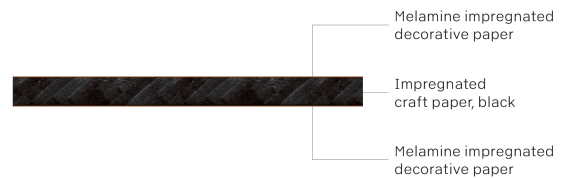

© Copyright 2019 Pfleiderer Deutschland GmbH / Pfleiderer Polska sp. z o.o.

This information has been compiled with the greatest care. Nevertheless we can assume no liability for the correctness, completeness and up-to-date-ness of this information. Colour deviations caused by the printing technology are possible. In view of the ongoing further development and adaptation of our products, possible amendments to the relevant standards, laws and regulations, our technical data sheets and product documentation expressly do not constitute a legally binding assurance of the properties described there. In particular no guarantee of suitability for a concrete application can be derived. It is therefore the personal responsibility of the individual user in all cases to check the processing and suitability of the products described in this document for the intended application in advance, and to take into consideration the legal framework and the respective state-of-the-art. We furthermore expressly draw attention to the applicability of our General Terms and Conditions.